

SPECIFICATIONS




AUTHENTICATION AUTHORITY	UL		TÜV Rheinland
AUTHENTICATION STANDARD	UL 2251	CSA C22.2 NO.282-13	IEC 62196-3:2014 EXCLUDING CLAUSE 25.301
RATED VOLTAGE	DC 500V		
RATED CURRENT	125A		
NUMBER OF POLES	POWER 2, SIGNAL 7		
CABLE TYPE	DESTINATION	SIZE	CABLE OUTSIDE DIAMETER φA
	JAPAN	POWER : 33sq×2 SIGNAL : 0.80sq×9	30.8mm±0.8mm
	NORTH AMERICA	POWER : 2AWG×2 SIGNAL : 18AWG×9	32.8mm±0.9mm
	EUROPE RUSSIA	POWER : 35sq×2 SIGNAL : 0.80sq×9	27.8mm±0.7mm
OPERATION TEMPERATURE RANGE	-40~60°C		

CONFORMING TO THE EUROPEAN ELV AND RoHS DIRECTIVES

仕様

認証機関	UL		TÜV Rheinland
認証規格	UL 2251	CSA C22.2 NO.282-13	IEC 62196-3:2014 (25.301項は除外する)
定格電圧	DC 500V		
定格電流	125A		
極数	POWER 2, SIGNAL 7		
ケーブルタイプ	仕向地	サイズ	電線外径 φA
	日本	POWER : 33sq×2 SIGNAL : 0.80sq×9	30.8mm±0.8mm
	北米	POWER : 2AWG×2 SIGNAL : 18AWG×9	32.8mm±0.9mm
	欧州 ロシア	POWER : 35sq×2 SIGNAL : 0.80sq×9	27.8mm±0.7mm
動作温度	-40~60°C		

欧州ELV, RoHS指令に対応

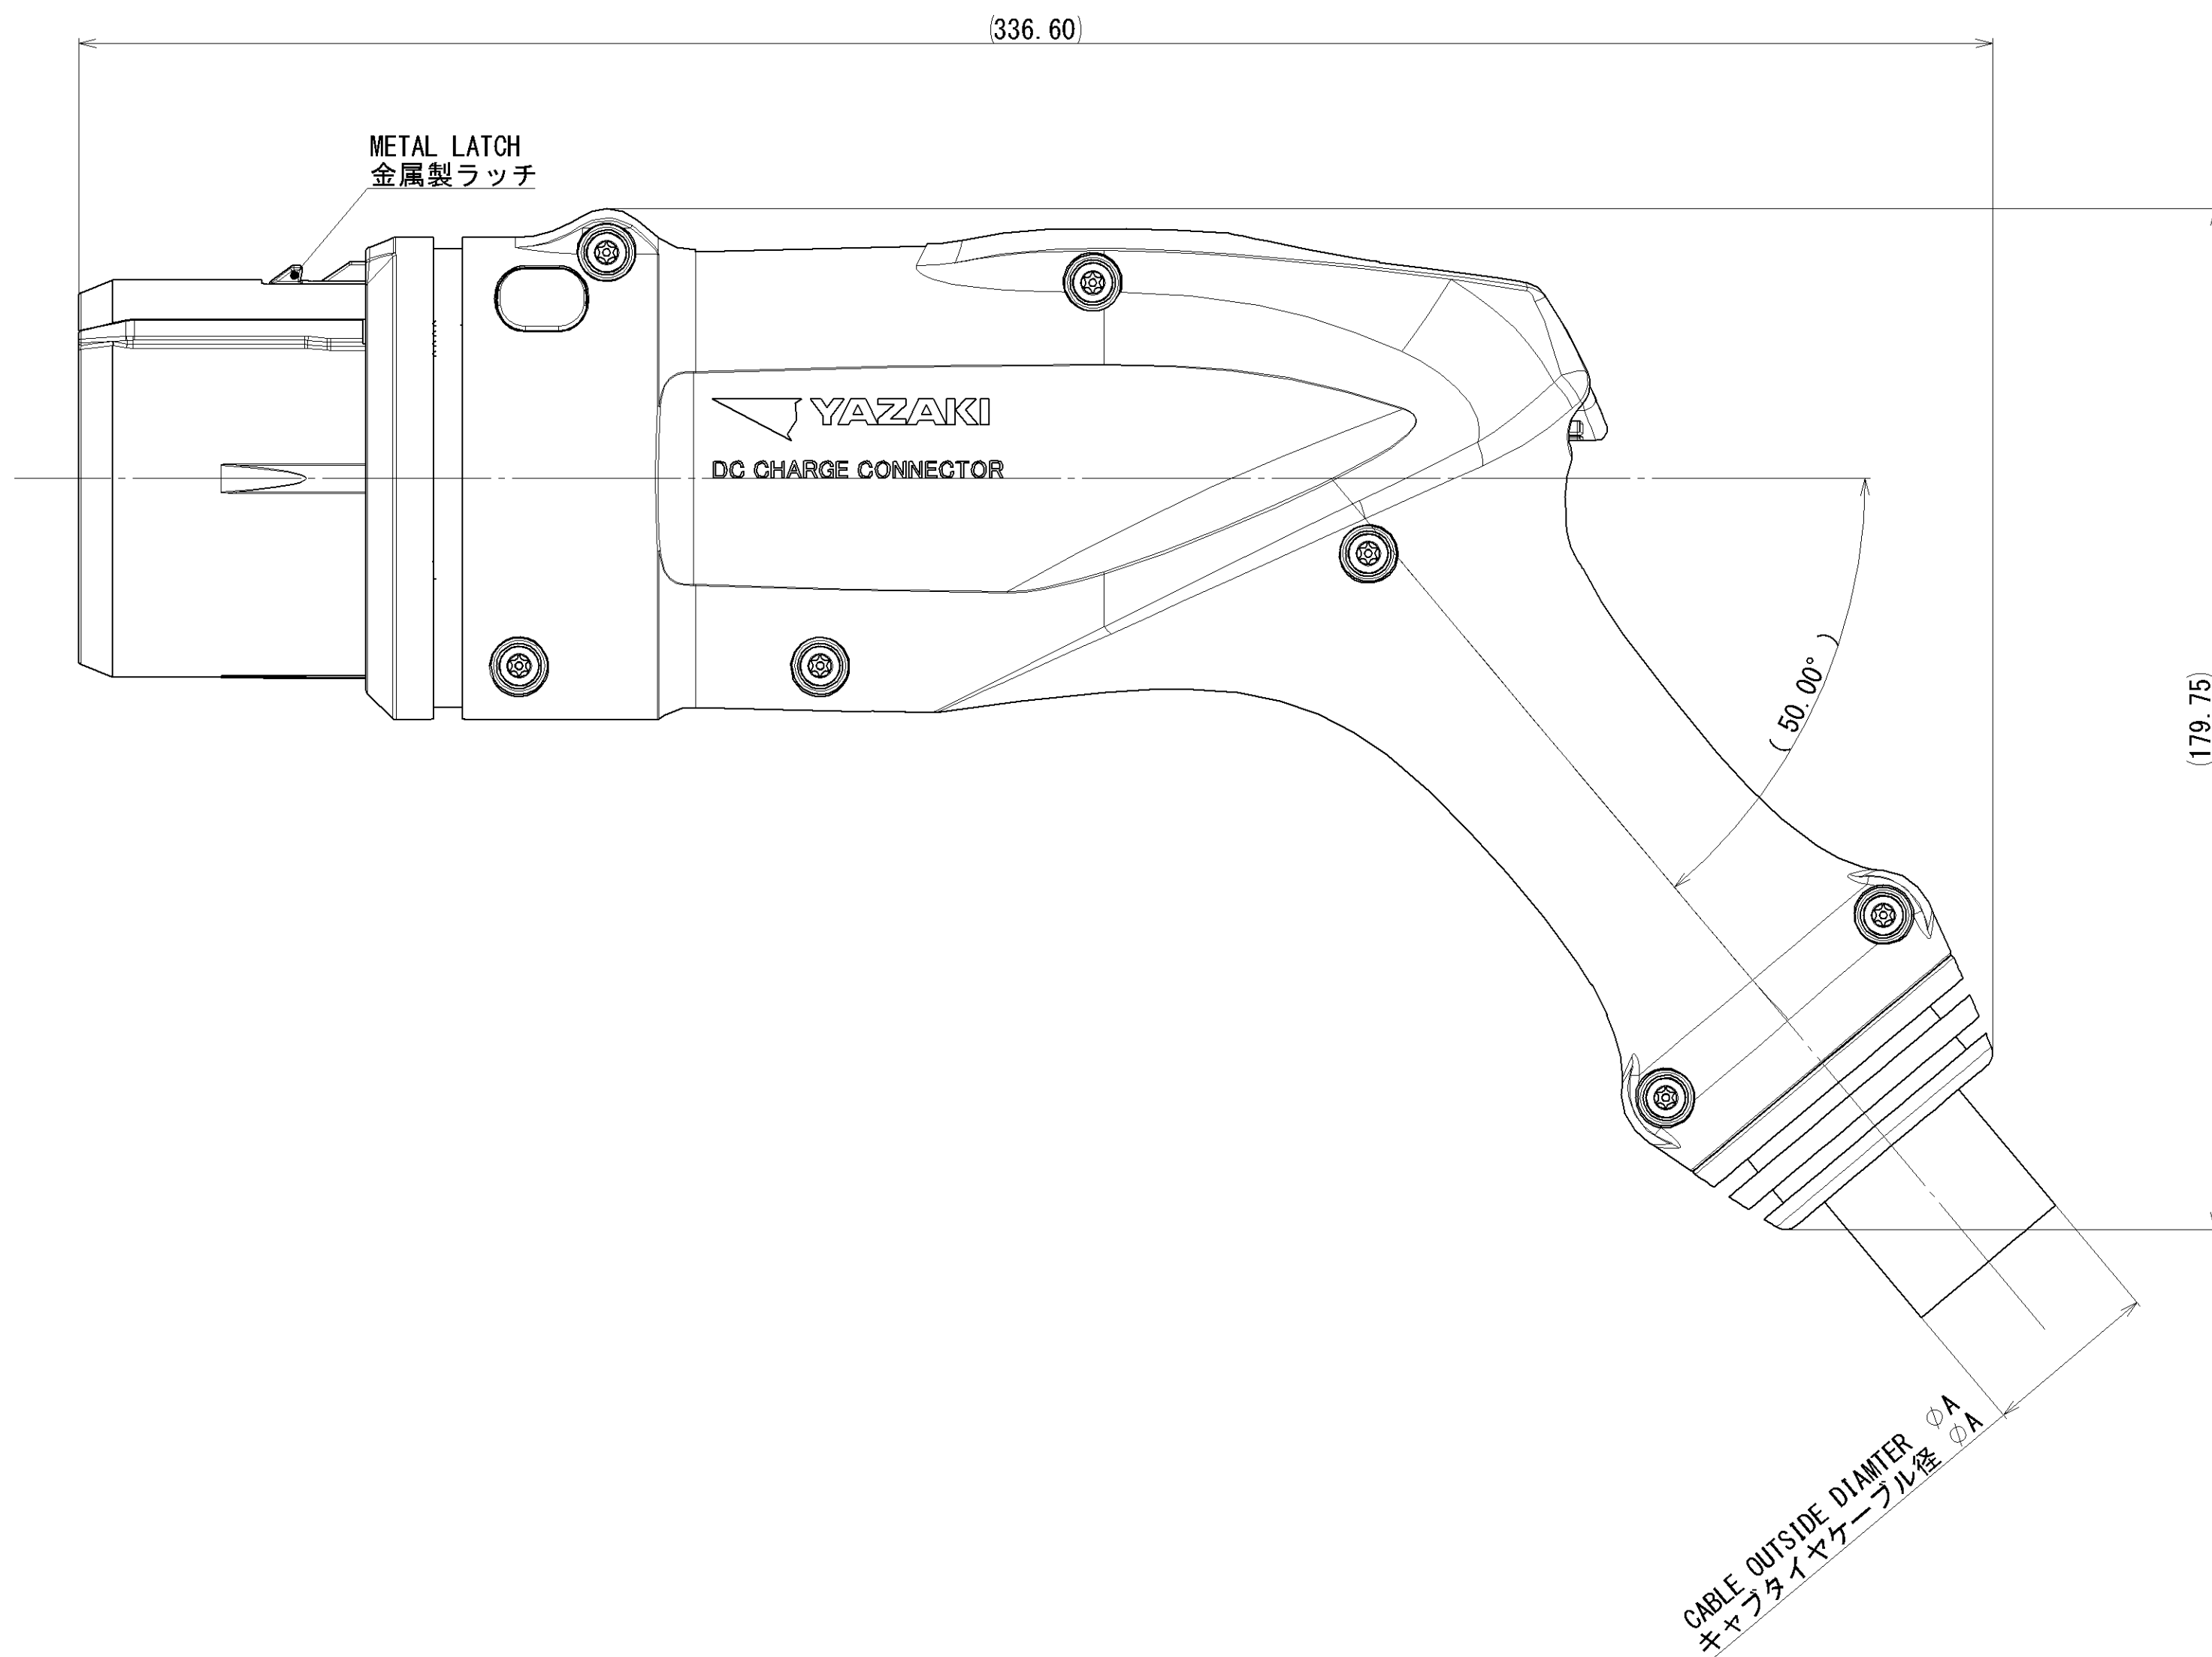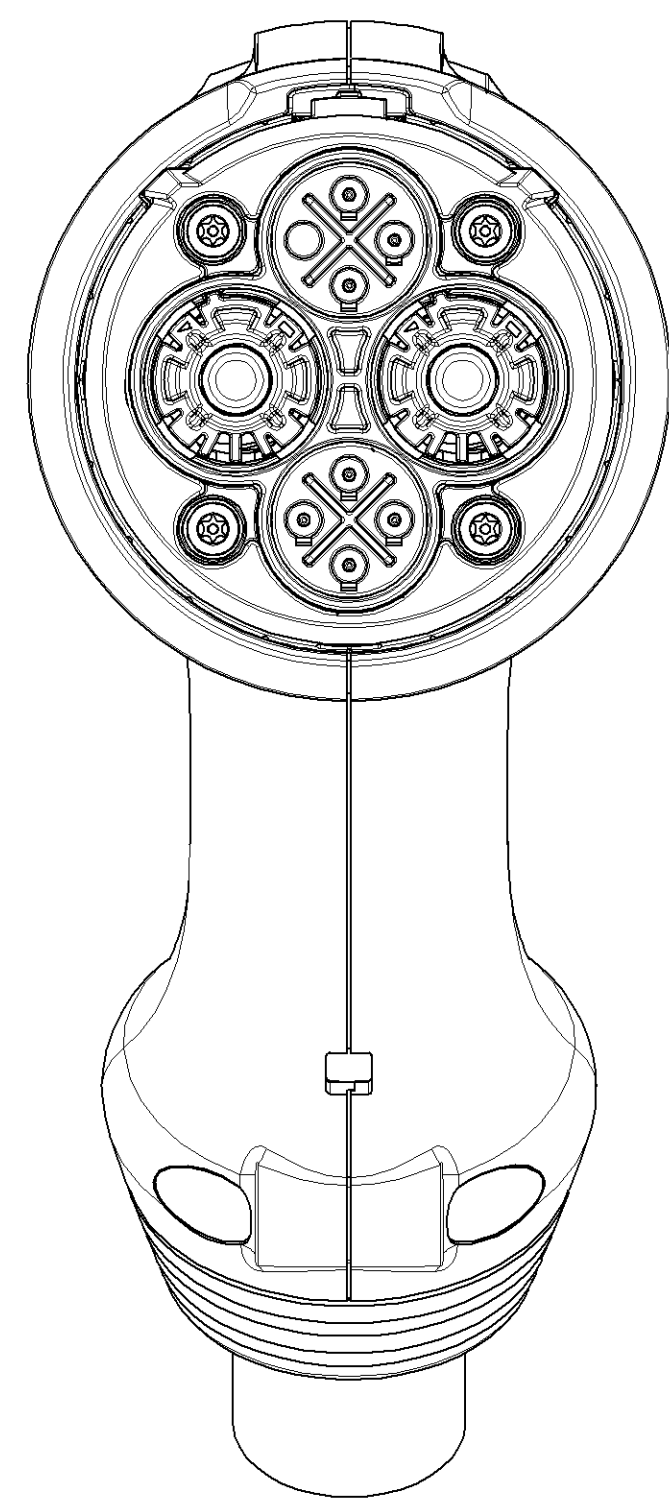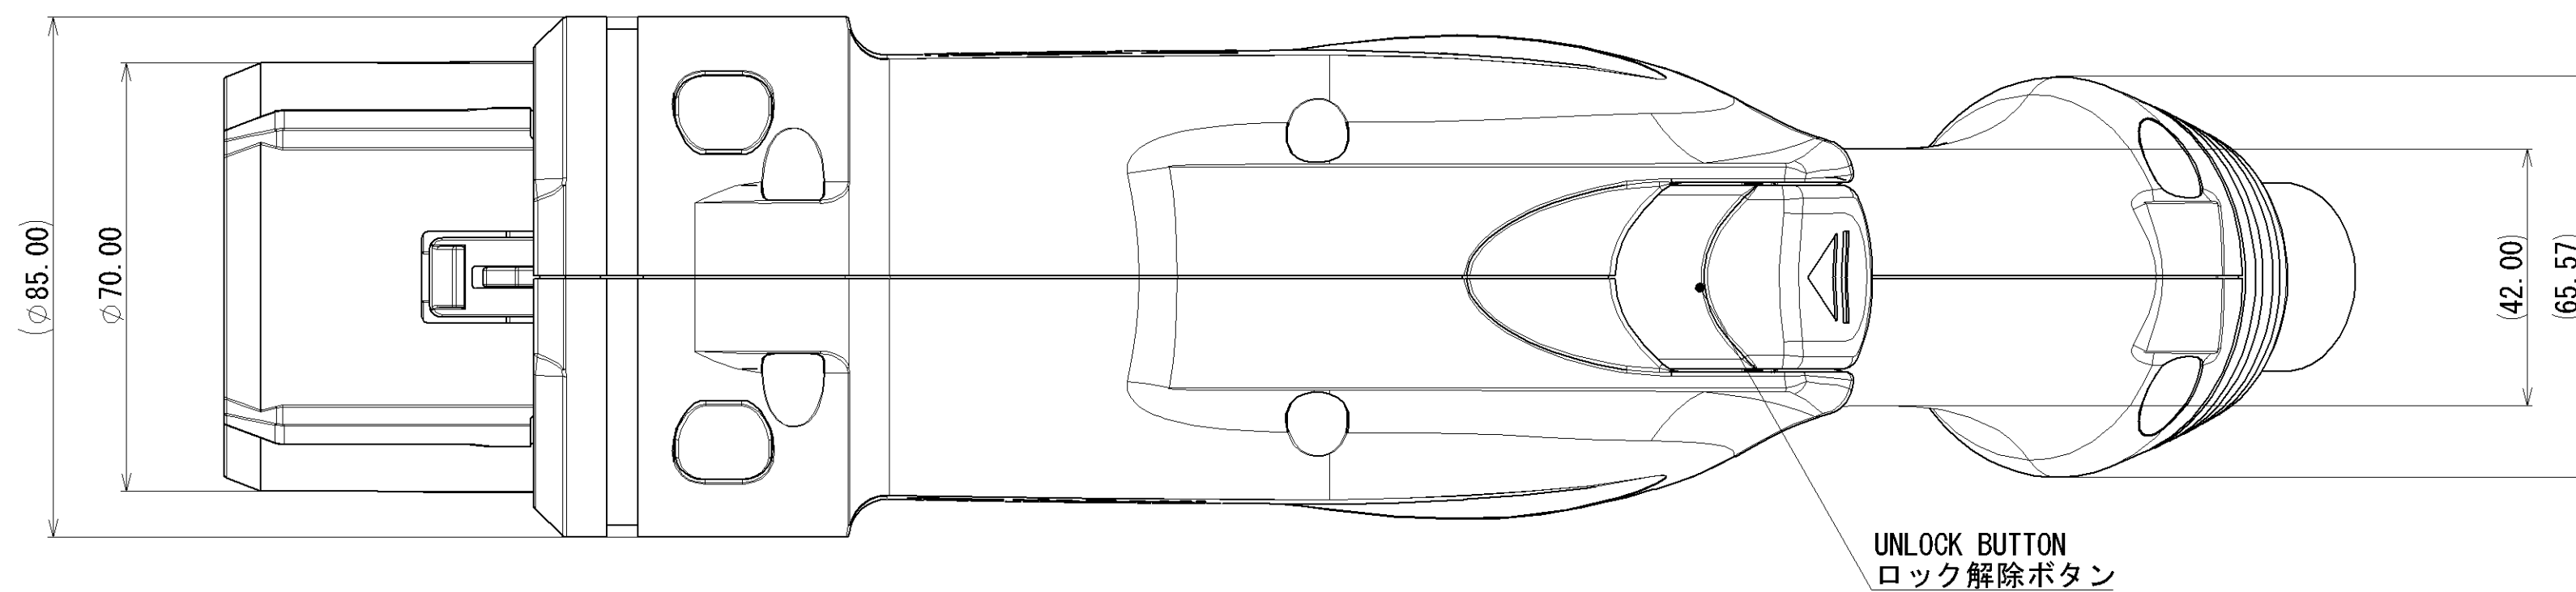

SCALE 1:1 ANGLE 3

NAME DC CHARGING CONNECTOR/VEHICLE-SIDE CONNECTOR  
DC充電コネクタ/車両側コネクタ  
YAZAKI CORPORATION